



Creating a safer place®

# How to **Operate** Guide Hinge Window Security Screen Handle & How to **Install** Guide Hinge Window Security Screen Key

---

## How to **Video**

Scan the code below to view a video for both locking and non-locking handle operation.



# How to Operate Guide

## Hinge Window Security Screen Handle

These instructions can be used for both locking and non-locking handles.

For non locking handle operation start from e. and lift handle out as shown.



a. locked position



b. place key into position



c. turn key to unlocked position  
(nearly 1 full turn until stops turning)



d. remove key when unlocked



e. handle will pop-out or can be  
lifted



f. turn handle inward 90 degrees



g. pull or push handle (pull-inswing  
window, push-outswing window)  
gently to open screen.



h. screen in open position



i. reverse order to close and lock

# How to Install Guide


## Hinge Window Security Screen Key

### **\*\*IMPORTANT\*\***

When installing any fall prevention screen, it must satisfy the requirements of the National Construction Code and Australian Standards 5203. If this screen is being used as a fall prevention screen and has a locking handle with key, then the key's location plays an important part in the installation. It is a requirement of the Code that the key is located out of reach from small children. Please follow this guide to help identify a suitable location for the key. Only an adult and/or responsible person should open this screen in the event of an emergency or for any other purpose, and it should be immediately relocked and the key put away in the appropriate location after use.

### Night-Glow®

The key has been designed with Night-Glow materials, to assist you should you need to find the key in the dark. To extend the glow duration, position the key where it can get maximum daylight.

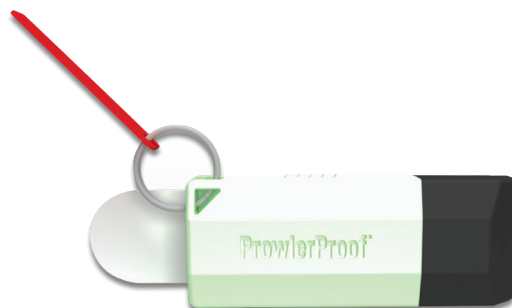

The **KEY** should be placed away from small children.

- Place the key on a key ring and away from where small child can access the key, or
- Place the key and its holder at a minimum of 1700mm above the floor level and any climbable object

